


Weighing Kit for 2-Axle Vehicles and Vans - Touch Screen Version

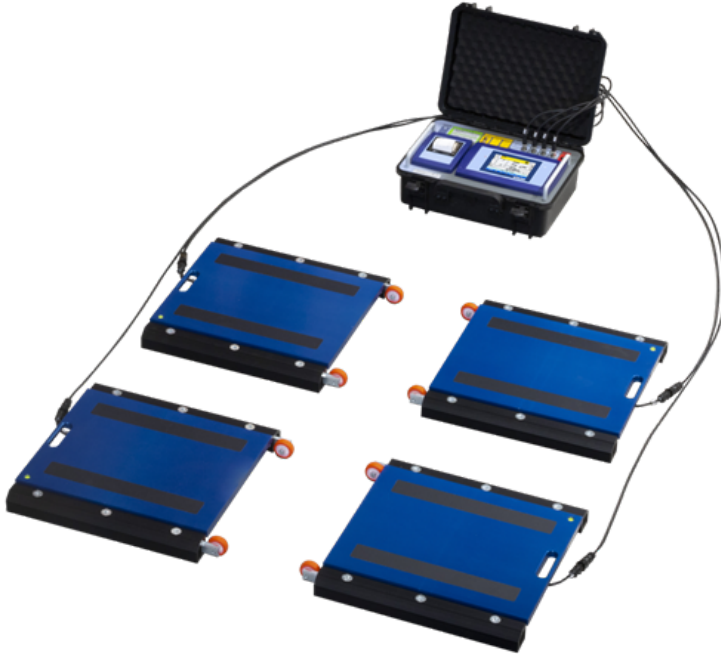

Standard Features

- The vehicle weighing kit is composed of 4 WWS weighing pads, a product patented by Dini Argeo. The loading surface is made of a special high-strength aluminum alloy, designed to be strong and light. The IP68 protection against water and dust ensures a long life of the pads even in case of bad weather. Easy to move and position, thanks to the integrated wheels.
- The touch screen weight indicator simplifies the use of the scale and allows the entry of master data. With integrated printer or USB communication port to save the weighs and transport case to protect the weight indicator even in the rain. 10h of autonomy, thanks to the rechargeable battery.

WWS wheel pads are the most cost-effective solution patented by Dini Argeo for weighing a vehicle. Thanks to the low weight and ease of transport, in just a few minutes it is possible to create a weighing station for weighing 2-axle vehicles. Compared to a traditional weighbridge, it does not require masonry work that can permanently occupy part of the yard space and is easily transportable.

The vehicle weighing kit is ideal to:

- Weigh 2-axle vehicles and vans.
- Check the weight of the material transported by the vehicle and carry out simple checks on incoming/outgoing goods.
- Weigh for limited periods of time (harvests, crops, etc.) without the need for excavations or masonry work.
- Check for any vehicle overloads, avoiding penalties.
- Check the correct balancing of the vehicle.

Weighs the whole vehicle and calculates the weight of the axles. Consisting of 4 WWS series portable platforms and the touch screen weighing terminal with integrated printer. Cable version.

Weighing Kit for 2-Axle Vehicles and Vans - Touch Screen Version Specifications

Available Functions:

Complete weighing of a vehicle.
Weighing with insertion of the preset tare.
Verification of the vehicle balance, with indication of the center of gravity and weight of each wheel.
Database of 500 vehicles.
Customizable texts.
Printing and saving of the weighs on USB memory (optional).

Approvals:

The system is CE approved according to Directive 2014/31/EU (NAWI).

Available Versions

Code	l x w x h (mm)	Max (kg)	d (kg)	M (kg)	d HR (kg)*	Notes
WWSB600-2	400x300x58	600	0,2	0,2	--	Price for single platform
WWSB1500-2	400x300x58	1500	0,5	0,5	--	Price for single platform
WWSB3T-2	400x300x58	3000	1	1	0,1	Price for single platform
WWSB8T-2	400x300x58	8000	5	5	0,5	Price for single platform
WWSB8T-2	400x300x58	8000	5	5	0,5	Price for single platform
WWSC1.5T-2	500x400x58	1500	0,5	0,5	0,05	Price for single platform
WWSC3T-2	500x400x58	3000	1	1	0,1	Price for single platform
WWSC6T-2	500x400x58	6000	2	2	0,2	Price for single platform
WWSC10T-2	500x400x58	10000	5	5	0,5	Price for single platform
WWSC15T-2	500x400x58	15000 (12500**)	5	5	0,5	Price for single platform
WWSE6T-2	700x450x58	6000	2	2	0,2	Price for single platform
WWSE10T-2	700x450x58	10000	5	5	0,5	Price for single platform
WWSE15T-2	700x450x58	15000 (12500**)	5	5	0,5	Price for single platform
WWSD6T-2	900x500x58	6000	2	2	0,2	Price for single platform
WWSD10T-2	900x500x58	10000	5	5	0,5	Price for single platform
WWSD15T-2	900x500x58	15000	5	5	0,5	Price for single platform
WWSD20T-2	900x500x58	20000 (15000**)	10	10	1	Price for single platform

(*) These divisions are obtainable only with the relative options

(**) In combination with ECEM approval.

Parts

Part #	Description
{#Available Versions}	
WWSB600-2	Wheel weighing platform with 600 kg maximum capacity, 0.2 kg division, loading surface 400x300 mm, height 58 mm.
WWSB1500-2	Wheel weighing platform with 1500 kg maximum capacity, 0.5 kg division, loading surface 400x300 mm, height 58 mm.
WWSB3T-2	Wheel weighing platform with 3000 kg maximum capacity, 1 kg division, loading surface 400x300 mm, height 58 mm.
WWSB6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 400x300 mm, height 58 mm.
WWSB8T-2	Wheel weighing platform with 8000 kg maximum capacity, 5 kg division, loading surface 400x300 mm, height 58 mm.
WWSC1.5T-2	Wheel weighing platform with 1500 kg maximum capacity, 0.5 kg division, loading surface 500x400 mm, height 58 mm.
WWSC3T-2	Wheel weighing platform with 3000 kg maximum capacity, 1 kg division, loading surface 500x400 mm, height 58 mm.
WWSC6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 500x400 mm, height 58 mm.
WWSC10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 500x400 mm, height 58 mm.
WWSC15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 500x400 mm, height 58 mm.
WWSE6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 700x450 mm, height 58 mm.
WWSE10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 700x450 mm, height 58 mm.
WWSE15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 700x450 mm, height 58 mm.
WWSD6T-2	Wheel weighing platform with 6000 kg maximum capacity, 2 kg division, loading surface 900x500 mm, height 58 mm.
WWSD10T-2	Wheel weighing platform with 10000 kg maximum capacity, 5 kg division, loading surface 900x500 mm, height 58 mm.
WWSD15T-2	Wheel weighing platform with 15000 kg maximum capacity, 5 kg division, loading surface 900x500 mm, height 58 mm.
WWSD20T-2	Wheel weighing platform with 20000 kg maximum capacity, 10 kg division, loading surface 900x500 mm, height 58 mm.
{#Transportable weight indicators, with transport case}	
3590ETKR-3	For analogue WWS (WWS...-y) only. Touch screen indicator in transport case with printer, AF08 software. Colour display. Available only in combination with Dini Argeo vehicle weighing systems (WWS, RWS, DTW, WBSA series).

Options

Part #	Description
{#High resolution (d HR) (only at time of order)}	
EHR	High resolution model for internal factory use.
{#International power plugs}	
AUS-V4	Version with AU charger.
UK-V4	Version with UK charger.
US-V4	Version with US charger.
{#Optional power supply cords}	
PWCORDAUSVDE	Version with AU power cord.
PWCORDUKVDE	Version with BS1363 power cord (UK plug).
PWCORDUSVDE	Version with US type B power cord. (Japan, North and Central America).
{#Legal for Trade Approval (only at time of order)}	
ECCEM	3000e legal for trade approval, for single platform/scale. NOTE: Depending on the product, the ECEM approval service may require DINICAL calibration service. Check to see if DINICAL is in the product options.
ECCEMTOT	EC type approval of total system capacity, for WWS multi-platform wheel weighing systems. Attention: ECCEMTOT excludes the functionality of selecting the number of connected platforms.
{#On / Off ramp}	
WWSCR	Single aluminium ramp for WWSC. Dimensions 500x150x30mm
WWSER	Single aluminium ramp for WWSE. Dimensions 700x150x30mm.
WWSDR	Single aluminium ramp for WWSD and WWSF. Dimensions 900x150x30mm.
{#Levelling mats for axle weighing}	
LMEK12	"Easy Level" kit, for WWSE. Consisting of 12 levelling modules and 4 ramps.
LMDK18	"Easy Level" kit, for WWSD. Consisting of 20 levelling modules and 4 ramps.
{#Frame for flush floor installation}	
WWSCFTF	Frame for flush floor installation. For WWSC series pad.
WWSEFTF	Frame for flush floor installation. For WWSE series pad.
WWSDFTF	Frame for flush floor installation. For WWSD pad.
WWSFTF	Frame for flush floor installation. For WWSF series pad.
{#Storing Weighments}	
USBEGTKR	Built-in USB port kit for indicator in transport case. It does not occupy serial ports. Complete of USB key for PC. TAKE NOTE: this interface is not available on its own, always to be combined with a weight indicator when ordering.
USBK	Set of 5 USB keys for recording the weighs.